

ramplo

WORLD FAMOUS WAREHOUSE EQUIPMENT



ramplo.net

THE CORE ADVANTAGES OF OUR PRODUCTS AND SERVICES

RAMPLO – is a world known producer of high-quality warehouse equipment. We offer a unique combination of low prices and excellent quality.



high quality of a whole product line of the equipment under TM RAMPLO



the lowest possible prices



superb pre- and after- sales service



the most popular models are always in stock



personal approach to customers, since our dealers know their local market much better than anybody else

RAMPLO EQUIPMENT IS SOLD ONLY THROUGH DEALERS



Company employees provided us with professional advice on the equipment we needed. The ramp is delivered within the agreed terms. Equipment is qualitative, the price is reasonable.




We are grateful to RAMPLO for the cooperation. We recommend RAMPLO equipment as reliable and high-quality, that became our indispensable helper in our work.



Thanks to RAMPLO warehouse equipment we significantly reduced the time and cost of loading and unloading activities and for their performance there is quite enough a driver of the forklift.




Thanks a lot! We are satisfied with quality, price and service. We recommend RAMPLO.

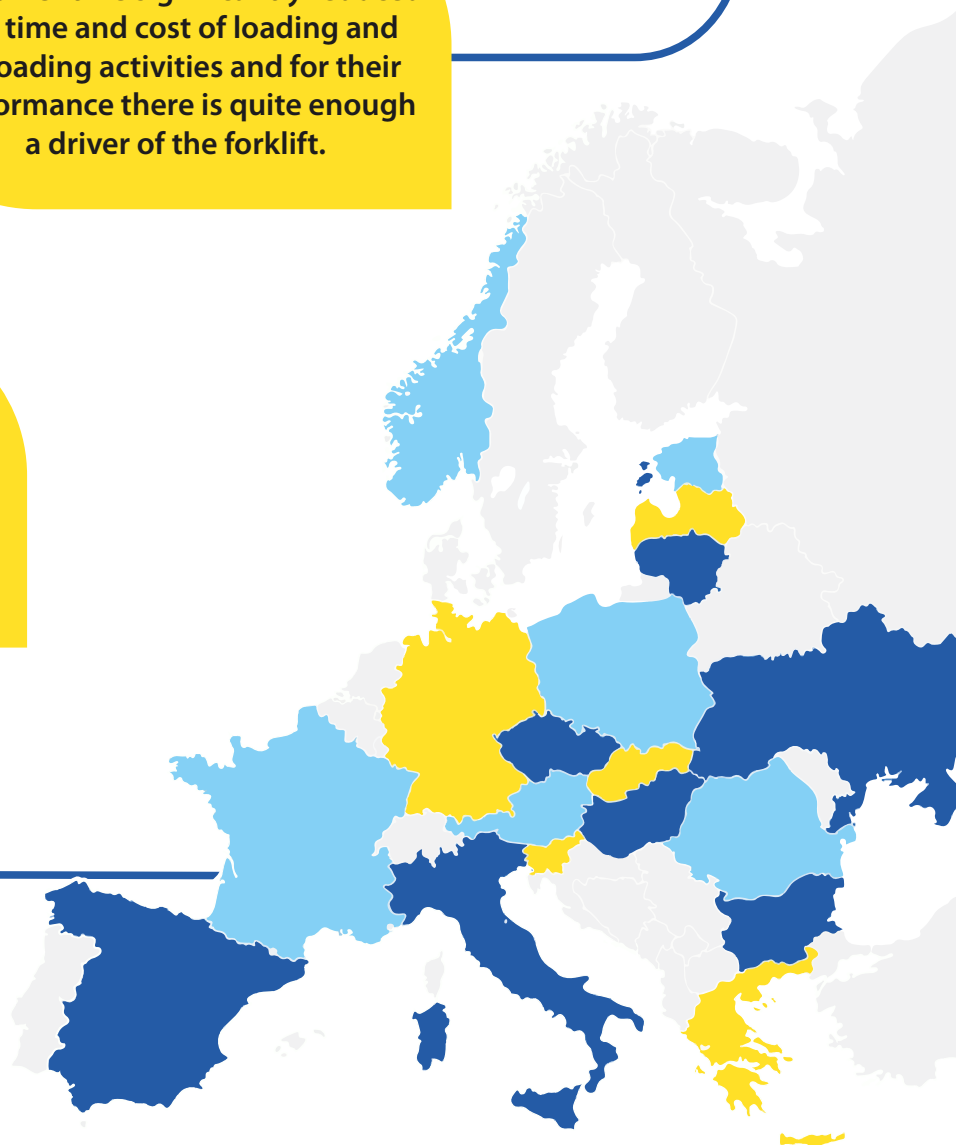

The mobile ramp RAMPLO is special equipment that allows a forklift to load and unload trucks, railway wagons, driving inside it from the ground level. The mobile ramp works as a mobile bridge and can be adjustable in height. We manufacture a wide range of mobile ramps. Thus, our customers can choose that solution that fully meets their needs. Moreover, we can manufacture custom mobile ramps based on individual customer requests, and complement such equipment with any available options.

FEATURES OF THE MOBILE RAMP RL-MR:

- load capacity – from 6 to 12 tons and more;
- total length (L) – from 9010 to 13010 mm and more;
- total width (D) – from 2230 to 2350 mm and more;
- height level (N) – from 890 mm to 1740 mm;
- wheel sets;
- hydraulic / electric pump.

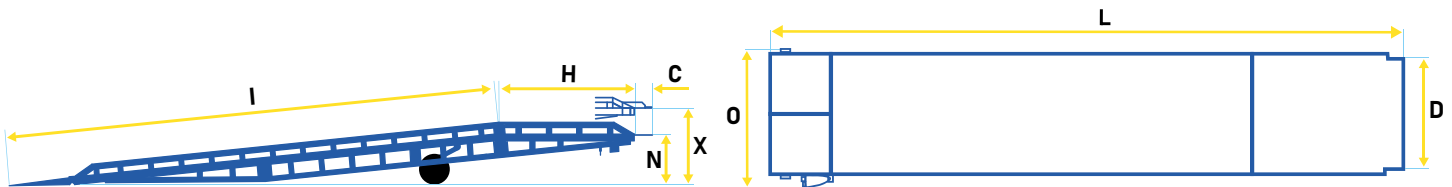

No	Model*	Weight capacity, tons	L	H	C	L	D	O	N	X
1	RL-MR-STD6	6	8010	2230	270	10510	1990	2230	890	1640
2	RL-MR-STD8**	8	8010	2230	270	10510	1990	2270	890	1640
3	RL-MR-STD10	10	8510	2430	270	11210	1990	2310	890	1640
4	RL-MR-STD12	12	8510	2430	270	11210	1990	2350	890	1640
5	RL-MR-SML6	6	8010	730	270	9010	1990	2230	890	1540
6	RL-MR-SML8	8	8010	730	270	9010	1990	2270	890	1540
7	RL-MR-SML10	10	8510	730	270	9510	1990	2310	890	1560
8	RL-MR-SML12	12	8510	730	270	9510	1990	2350	890	1560
9	RL-MR-BIG6	6	9210	2530	270	12010	1990	2230	890	1690
10	RL-MR-BIG8	8	9210	2530	270	12010	1990	2270	890	1690
11	RL-MR-BIG10	10	9910	2830	270	13010	1990	2310	890	1740
12	RL-MR-BIG12	12	9910	2830	270	13010	1990	2350	890	1740

****RL-MR-STD8 is the most popular model with shortest production time or even availability on stock**

*** we also make individual ramps – shorter / longer, wider / narrower, higher / lower, other loading capacity and configuration**

ADDITIONAL OPTIONS FOR MOBILE RAMPS – RL-MR

ramplo

2SL



SAFETY LEGS ADJUSTABLE IN
HEIGHT, INSTALLED ON RAMP

HR



ADDITIONAL PROTECTIVE HAND
RAILINGS, MOUNTABLE

EHP



ELECTRIC HYDRAULIC STATION
INSTEAD OF MANUAL

EHMP



ELECTRIC HYDRAULIC STATION
AND MANUAL PUMP

2SL3SW




THREE-SIDED UNLOADING MOBILE
RAMP, SUPPLIED WITH SAFETY
LEGS

4WL



ADDITIONAL PAIR OF WHEELS

ZRS

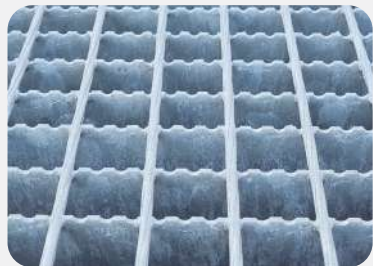


ZINC-COATED ANTI-SKID GRATING
INSTEAD OF REGULAR

ZRS



ZINC-COATED GRATING INSTEAD
OF REGULAR

SRS

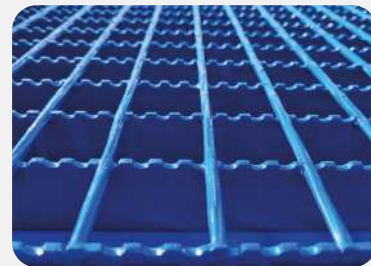

ANTI-SKID GRATING INSTEAD OF
REGULAR

TC



TENT COVER OVER THE RAMP,
MOUNTABLE

CLR



COLOR

THE MOBILE RAMP RAMPLO (CUSTOM REQUEST) – RL-MR-SPCL

ramplo

The products RAMPLO are represented not only by standard models. Our company can manufacture individual orders based on all customer requirements.

Along with standard ramps, we design and produce ramps with individual sizes and characteristics. With more than 10 years of experience, our engineers and designers have been developing mobile and fixed ramps of any complexity and load capacity.


THE CHARACTERISTICS OF THE MOBILE RAMPS RAMPLO, WHICH CAN BE AMENDED UPON CUSTOMER'S REQUEST:

- load capacity – from 6 to 30 tones and more;
- total length – in case of special needs up to 15 m and more;
- overall width – up to 3000 mm and more;
- height of protective fencing – minimum 0 mm, maximum 1100 mm;
- heights' level – min and max heights, the working range of hydraulics no more than 80 cm. For example, the minimum height is 750 mm, maximum (in this case) – 1550 mm. The max height in standard ramps is 1750 mm! It's optimal not only for trucks, but even for railway carriage!
- and other amendments according to customer wishes.




ADDITIONAL OPTIONS FOR
CUSTOM RAMPS – RL-MR-SPCL

2SL



SAFETY LEGS ADJUSTABLE IN
HEIGHT, INSTALLED ON RAMP

HR



ADDITIONAL PROTECTIVE HAND
RAILINGS, MOUNTABLE

EHP




ELECTRIC HYDRAULIC STATION
INSTEAD OF MANUAL

EHMP




ELECTRIC HYDRAULIC STATION
AND MANUAL PUMP

2SL3SW



THREE-SIDED UNLOADING MOBILE
RAMP, SUPPLIED WITH SAFETY
LEGS

4WL



ADDITIONAL PAIR OF WHEELS

ZSRS



ZINC-COATED ANTI-SKID GRATING
INSTEAD OF REGULAR

ZRS




ZINC-COATED GRATING INSTEAD
OF REGULAR

SRS



ANTI-SKID GRATING INSTEAD OF
REGULAR

TC



TENT COVER OVER THE RAMP,
MOUNTABLE

CLR




COLOR

As well as other types of mobile ramps, this one due to its small dimensions allows operate the ramp comfortable and easily, simplify and speed up logistics operations in warehouses for unloading and loading packaged goods for budget projects.

The ramp is equipped with telescopic legs for the height adjustment and with rollers for movement.

FEATURES OF THE MOBILE RAMP RL-MREC:

- load capacity – from 5 to 9 tones and more;
- total length – from 8000 mm and more;
- carriageway width of the inclined part – up to 1510 mm and more;
- carriageway width of the horizontal part – from 2140 to 2180 mm and more;
- height level – minimum 940 mm, maximum 1340 mm;
- side tow pole and ramp transport wheels;
- the ramps' roadway is made of steel grating.

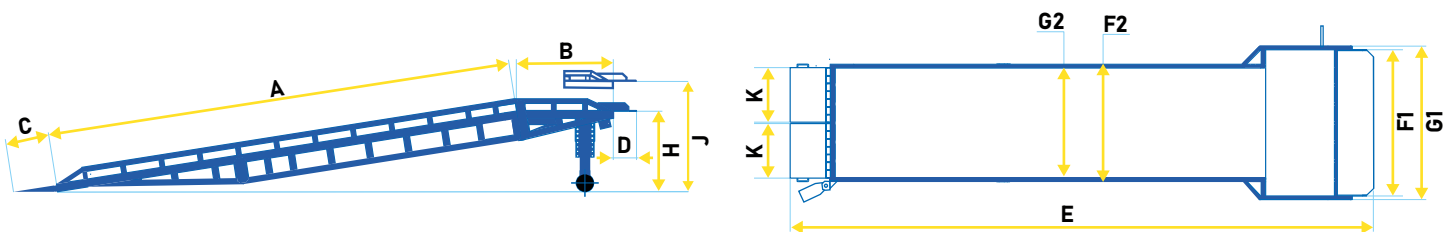

№	Model*	Weight capacity, tons	A	B	C	D	E	F1	F2	G1	G2	H	J	K
1	RL-MREC-05	5	6000	1200	510	290	8000	2010	1510	2140	1640	940	1340	750
2	RL-MREC-07**	7	6000	1200	510	290	8000	2010	1510	2160	1660	940	1340	750
3	RL-MREC-09	9	6000	1200	510	290	8000	2010	1510	2180	1680	940	1340	750

** RL-MREC-07 is the most popular model with shortest production time or even availability on stock


The RL-MRLX mobile ramps are part of the extensive RAMPLO ramp range. They allow trucks and containers to be loaded / unloaded from ground level without any labor costs. RAMPLO ramps are manufactured from a robust, steel, welded construction. The ramp is equipped with a galvanised anti-slip grid, which ensures safe passage across the ramp in all weather conditions. It is also durable and does not require quick replacement when the ramp is in daily use.

FEATURES OF THE MOBILE RAMP RL-MRLX:

- load capacity – from 8 to 16 tones and more;
- total length – from 9420 to 13420 mm and more;
- total width – up to 2510 mm and more;
- height level – minimum 890 mm, maximum 1740 mm;
- solid wheels – 2 pieces;
- carriageway surface – zinc coated serrated grating;
- pump – manual hydraulic pump;
- complete set – chains with hooks - 2 pieces, rubber wheel chocks, tow pole.

ADDITIONAL OPTIONS

- SL – Safety supporting legs
- HR – Protective removable handrails
- EHP – Electric (220V) hydraulic power station with a control panel
- EHBP – Electric (12V) hydraulic station with a battery pack
- TC – Tent cover
- CLR – Another colour

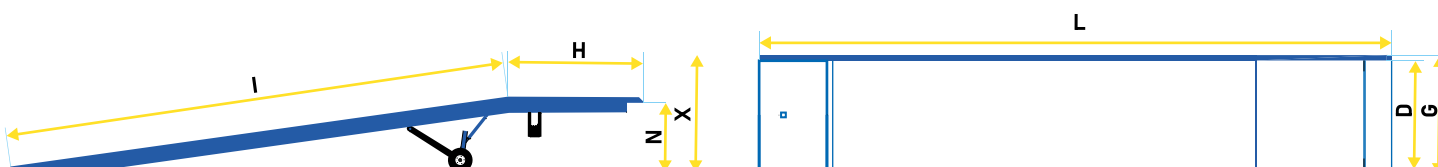

No	Model*	Weight capacity, tons	I	H	L	D	G	N	X
1	RL-MRLX08-094-20	8	7000	2420	9420	2010	2300	890	1640
2	RL-MRLX08-119-20**	8	9500	2420	11920	2010	2300	890	1690
3	RL-MRLX08-134-20	8	10500	2920	13420	2010	2300	890	1740
4	RL-MRLX08-134-25	8	10500	2920	13420	2510	2800	890	1740
5	RL-MRLX12-094-20	12	7000	2420	9420	2010	2300	890	1640
6	RL-MRLX12-119-20	12	9500	2420	11920	2010	2300	890	1690
7	RL-MRLX12-134-20	12	10500	2920	13420	2010	2300	890	1740
8	RL-MRLX12-134-25	12	10500	2920	13420	2510	2800	890	1740
9	RL-MRLX16-094-20	16	7000	2420	9420	2010	2300	890	1640
10	RL-MRLX16-119-20	16	9500	2420	11920	2010	2300	890	1690
11	RL-MRLX16-134-20	16	10500	2920	13420	2010	2300	890	1740
12	RL-MRLX16-134-25	16	10500	2920	13420	2510	2800	890	1740

** RL-MRLX08-119-20 is the most popular model with shortest production time or even availability on stock

* we also make individual ramps – shorter / longer, wider / narrower, higher / lower, other loading capacity and configuration



FIXED RAMPS RAMPLO (WITHOUT HORIZONTAL PART) – RL-FX

ramplo

To connect the ground level and a warehouse level, we manufacture the fixed loading ramp RL-FX, which consists only of an inclined part and a small connecting bridge.

FEATURES OF THE FIXED LOADING RAMPS RAMPLO RL-FX:

- fully steel frame;
- no need in concrete fixing;
- weight capacity from 6 to 10 tons and even more;
- length from 8270 to 12270 mm and even longer;
- width of the riding surface from 2 meters and wider;
- loading is distributed regularly overall several points of support;
- protective border through the whole length of the ramp for safe work;
- special connection bridge thickness 12 mm;
- riding surface is made from gratings and serrated steel sheets.

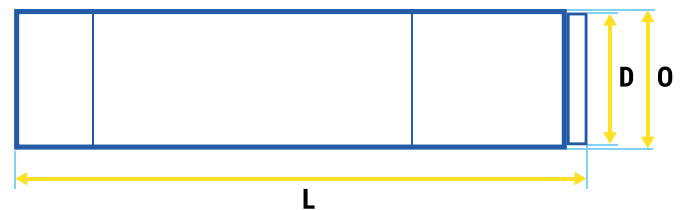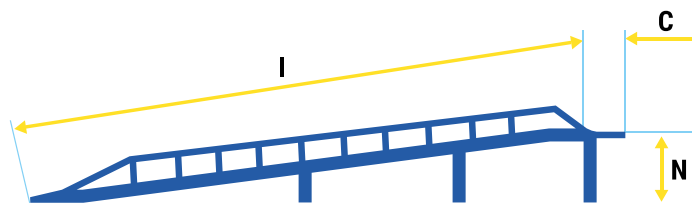

No	Model*	Weight capacity, tons	I	C	L	D	O	N
1	RL-FX-6000-80	6	8000	270	8270	2000	2230	1100/1200
2	RL-FX-6000-100	6	10000	270	10270	2000	2230	1100/1200
3	RL-FX-6000-120	6	12000	270	12270	2000	2230	1100/1200
4	RL-FX-8000-80	8	8000	270	8270	2000	2250	1100/1200
5	RL-FX-8000-100	8	10000	270	10270	2000	2250	1100/1200
6	RL-FX-8000-120	8	12000	270	12270	2000	2250	1100/1200
7	RL-FX-10000-80	10	8000	270	8270	2000	2270	1100/1200
8	RL-FX-10000-100	10	10000	270	10270	2000	2270	1100/1200
9	RL-FX-10000-120	10	12000	270	12270	2000	2270	1100/1200

* we also make individual ramps – shorter / longer, wider / narrower, higher / lower, other loading capacity and configuration

FIXED RAMPS RAMPLO (WITH HORIZONTAL PART) – RL-FXH



ramplo

For those customers who do not need mobility and height adjustment of the ramp, we can offer the fixed ramp RAMPLO RL-FXH with a horizontal platform that allows aligning the position a forklift just before driving inside of a truck or a warehouse.

Horizontal level-off of the ramp RL-FXH give ability for forklift driver to center its position before entering / leaving dock or truck / wagon, therefore its forks will be parallel to horizontal and will prevent damage of goods and equipment.

FEATURES OF THE FIXED LOADING RAMPS RAMPLO RL-FXH:

- fully steel frame;
- no need in concrete fixing;
- horizontal level-off for safe maneuvers of forklift;
- weight capacity from 6 to 10 tons and even more;
- length from 10770 to 12770 mm and even longer;
- width of the riding surface from 2 meters and wider;
- loading is distributed regularly overall several point of support;
- protective border through the whole length of the ramp for safe work;
- special connection bridge thickness 12 mm;
- riding surface is made from gratings and serrated steel sheets.

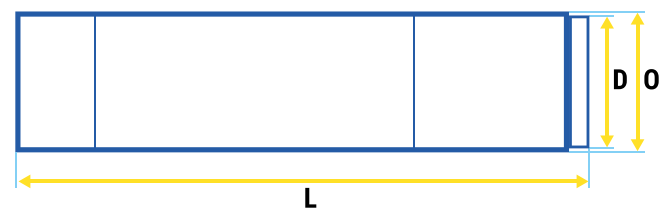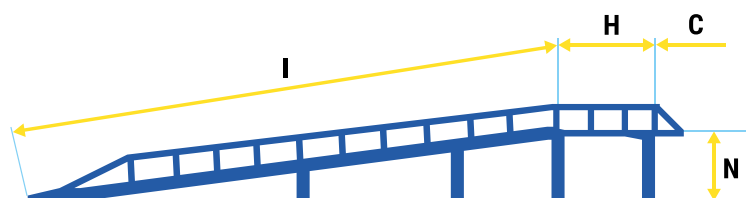

No	Model*	Weight capacity, tons	I	H	C	L	D	O	N
1	RL-FXH-6000-8025	6	8000	2500	270	10770	2000	2230	1100/1200
2	RL-FXH-6000-10025	6	10000	2500	270	12770	2000	2230	1100/1200
3	RL-FXH-8000-8025	8	8000	2500	270	10770	2000	2250	1100/1200
4	RL-FXH-8000-10025	8	10000	2500	270	12770	2000	2250	1100/1200
5	RL-FXH-10000-8025	10	8000	2500	270	10770	2000	2270	1100/1200
6	RL-FXH-10000-10025	10	10000	2500	270	12770	2000	2270	1100/1200

* we also make individual ramps – shorter / longer, wider / narrower, higher / lower, other loading capacity and configuration


LOADING RAMP RAMPLO: TYPE "WAREHOUSE-GROUND" – RL-GD

ramplo

For driving forklifts, vans, cars and other transport inside and outside warehouse. Connects 0 ground level and height of warehouse (usually about 1200 mm).

FEATURES OF LOADING RAMP: TYPE "WAREHOUSE-GROUND" RL-GD:

- load capacity – from 6 to 10 tons and more;
- total length (IC) – from 6270 to 12270 mm and more;
- total width (O) – 2120 mm and more;
- height level (N) – from 1100 to 1200 mm and more.

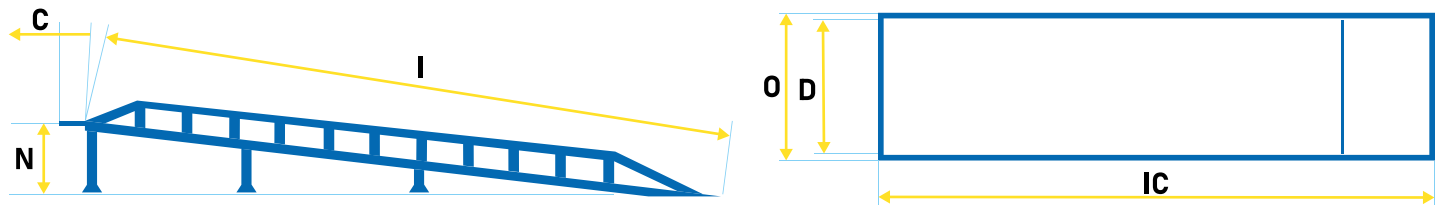

No	Model*	Weight capacity, tons	I	C	IC	D	O	N
1	RL-GD6000-6x2	6	6000	270	6270	2000	2120	1100/1200
2	RL-GD6000-8x2	6	8000	270	8270	2000	2120	1100/1200
3	RL-GD6000-10x2	6	10000	270	10270	2000	2120	1100/1200
4	RL-GD6000-12x2	6	12000	270	12270	2000	2120	1100/1200
5	RL-GD8000-6x2	8	6000	270	6270	2000	2120	1100/1200
6	RL-GD8000-8x2	8	8000	270	8270	2000	2120	1100/1200
7	RL-GD8000-10x2	8	10000	270	10270	2000	2120	1100/1200
8	RL-GD8000-12x2	8	12000	270	12270	2000	2120	1100/1200
9	RL-GD10000-6x2	10	6000	270	6270	2000	2120	1100/1200
10	RL-GD10000-8x2	10	8000	270	8270	2000	2120	1100/1200
11	RL-GD10000-10x2	10	10000	270	10270	2000	2120	1100/1200
12	RL-GD10000-12x2	10	12000	270	12270	2000	2120	1100/1200




* we also make individual ramps – shorter / longer, wider / narrower, higher / lower, other loading capacity and configuration

LEVELLING RAMPS RAMPLO FOR LCV – RL-LCVR

This is a special designed truck ramp for loading / unloading commercial vehicles at standard dock gates of modern warehouses. Our equipment helps to eliminate difference in heights of commercial vehicles (550-650 mm) and height of dock gates, dedicated for big semi-trailers (1100-1200 mm).

FEATURES OF LEVELLING RAMPS FOR LCV RL-LCVR:

- load capacity – from 5 to 8 tons and more;
- total length (IH) – from 11000 to 13000 mm and more;
- total width (O) – from 2450 to 6100 mm and more;
- height level (N) – from 550 to 650 mm and more.

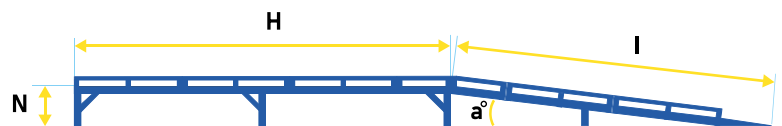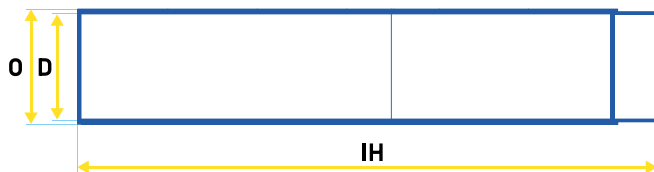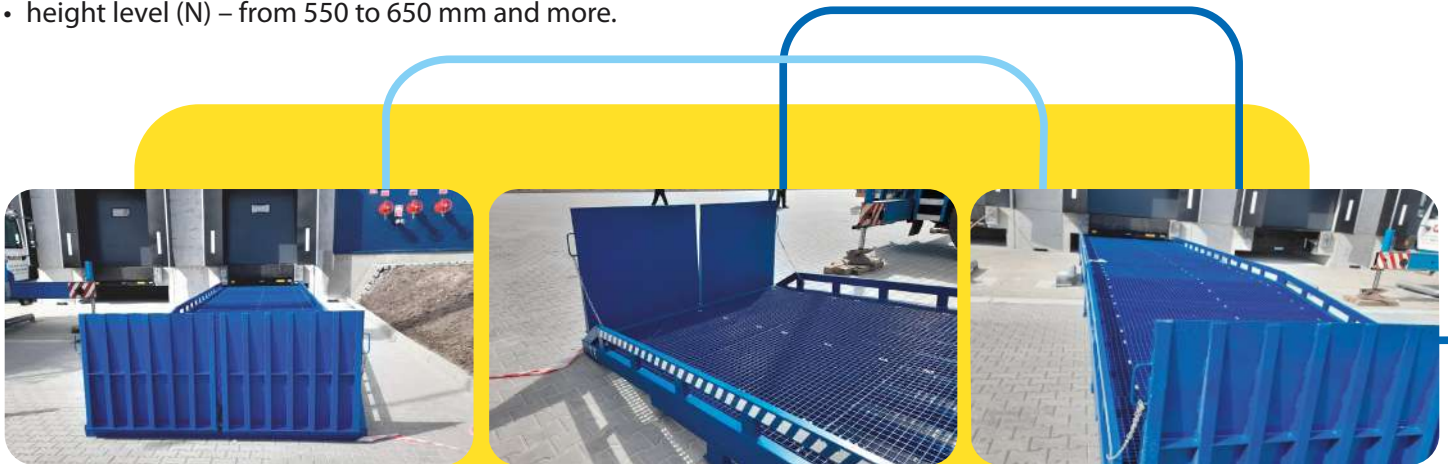

№	Model*	Weight capacity, tons	I	H	IH	N	D	O	a°
1	RL-LCVR8-I6000-H7000xD2350-N600**	8	6000	7000	13000	600	2350	2450	5,74
2	RL-LCVR8-I5000-H7000xD2350-N550***	8	5000	7000	12000	550	2350	2450	6,32
3	RL-LCVR5-I6000-H5000xD2350-N650****	5	6000	5000	11000	650	2350	2450	6,22
4	RL-LCVR8-I13000-H0xD2350-N550	8	13000	0	13000	550	2350	2450	2,42
5	RL-LCVR5-I11000-H0xD2350-N650	5	11000	0	11000	650	2350	2450	2,87
6	RL-LCVR8-I6000-H7000xD6000-N600*****	8	6000	7000	13000	600	6000	6100	5,74
7	RL-LCVR8-I5000-H7000xD6000-N550*****	8	5000	7000	12000	550	6000	6100	6,32
8	RL-LCVR8-I6000-H7000xD6000-N600*****	8	6000	5000	11000	650	6000	6100	6,22

** best choice – for all types of commercial vehicles, small and medium

*** for medium commercial vehicles, like Ford Transit, Mercedes Sprinter, Iveco Daily, VW Crafter, Fiat Ducato and similar

**** for small commercial vehicles like Renault Traffic, VW Transporter, Ford Transit Custom, Peugeot Expert and similar

***** shipped divided into 3 parts

* we also make individual ramps – shorter / longer, wider / narrower, higher / lower, other loading capacity and configuration

DIFFERENCES BETWEEN FIXED LOADING RAMPS RAMPLO

ramplo

Fixed ramps RAMPLO (without horizontal part) – RL-FX



A series of fixed ramp models without a horizontal platform, which consist only of an inclined part and a small connecting bridge. The overall length ranges from 8270 to 12270 mm and the carriageway width from 2 m.

The fixed ramp without horizontal part RL-FX is the best choice for accessing a warehouse well above ground level.

**6 - 10
TONS**

Fixed ramps RAMPLO (with horizontal part) – RL-FXH



These fixed ramps are equipped with a 2.5 m long horizontal part, in addition to the 8 to 10 m long of inclined part.

This feature of the RL-FXH fixed ramp allows the forklift driver to align his position before entering / leaving the warehouse, wagon or van, so that the forks of the forklift are parallel to the horizontal plane, which helps to prevent damage to the load and equipment.

**6 - 10
TONS**

Loading ramp RAMPLO: type "Warehouse-Ground" – RL-GD



Loading ramps RL-GD (type Warehouse-Ground) make loading and unloading convenient and easy. It is the best solution for warehouses where mobility and ramp height changes are not required. The overall length of the standard models is from 6270 to 12270 mm and the overall width from 2120 mm.

**6 - 10
TONS**

Levelling ramps RAMPLO for LCV – RL-LCVR




Fixed ramps have the lowest working height of 550-650 mm, making them ideal for commercial vehicles.

This series includes models with and without horizontal part. Overall length from 11 to 13 m and widths from 2450 to 6100 mm.

**5 - 8
TONS**

ADDITIONAL OPTIONS FOR FIXED RAMPS – RL-FX, RL-FXH, RL-GD, RL-LCVR

HR



ADDITIONAL PROTECTIVE HAND
RAILINGS, MOUNTABLE

FX FXH GD LCVR


HA1



HEIGHT ADJUSTMENT

FX FXH GD LCVR

WL



PAIR OF WHEELS FOR LOCAL
SMALL MOVING

FX FXH GD LCVR


3SW



THREE-SIDED UNLOADING

FX FXH GD LCVR


LDP



LADDER WITH THE PLATFORM
FOR PEDESTRIANS (FORKLIFT
DRIVER)

FX FXH GD LCVR


LD



LADDER TO RAMP

FX FXH GD LCVR

WR4100



WHEEL RISERS

FX FXH GD LCVR


4WCH



WHEEL CHOCKS

FX FXH GD LCVR

ZRS



ZINC-COATED GRATING
INSTEAD OF REGULAR

FX FXH GD LCVR

SRS



ANTI-SKID GRATING INSTEAD OF
REGULAR

FX FXH GD LCVR


ZSRS



ZINC-COATED ANTI-SKID
GRATING INSTEAD OF REGULAR

FX FXH GD LCVR


TC



TENT COVER OVER THE RAMP,
MOUNTABLE

FX FXH GD LCVR

CLR




COLOR

FX FXH GD LCVR

Enlarge dock area for better approach of truck, more space for warehouse technics maneuvering and extending area for actions with goods before or after loading / unloading to / from truck.

FEATURES OF THE LOADING PLATFORMS RAMPLO RL-LMP:

- load capacity – from 3 to 12 tons and more;
- total length (IC) – from 4270 to 6270 mm and more;
- total width (O) – from 2400 to 2800 mm and more;
- height level (N) – from 1100 to 1200 mm and more.

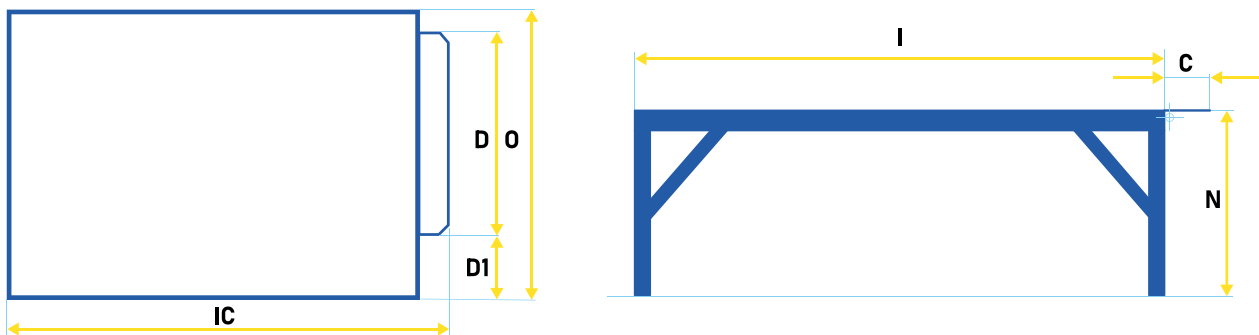

No	Model*	Weight capacity, tons	I	I	C	IC	N	D	D1
1	RL-LMP3000-4000x2400	3	2400	4000	270	4270	1100/1200	2000	300
2	RL-LMP3000-6000x2400	3	2400	6000	270	6270	1100/1200	2000	300
3	RL-LMP3000-4000x2800	3	2800	4000	270	4270	1100/1200	2000	700
4	RL-LMP3000-6000x2800	3	2800	6000	270	6270	1100/1200	2000	700
5	RL-LMP8000-4000x2400	8	2400	4000	270	4270	1100/1200	2000	300
6	RL-LMP8000-6000x2400	8	2400	6000	270	6270	1100/1200	2000	300
7	RL-LMP8000-4000x2800	8	2800	4000	270	4270	1100/1200	2000	700
8	RL-LMP8000-6000x2800	8	2800	6000	270	6270	1100/1200	2000	700
9	RL-LMP12000-4000x2400	12	2400	4000	270	4270	1100/1200	2000	300
10	RL-LMP12000-6000x2400	12	2400	6000	270	6270	1100/1200	2000	300
11	RL-LMP12000-4000x2800	12	2800	4000	270	4270	1100/1200	2000	700
12	RL-LMP12000-6000x2800	12	2800	6000	270	6270	1100/1200	2000	700

* we also make individual ramps – shorter / longer, wider / narrower, higher / lower, other loading capacity and configuration

ADDITIONAL OPTIONS FOR LOADING PLATFORMS – RL-LMP

ramplo

HA1



HEIGHT ADJUSTMENT ON
1 SIDE

HA2



HEIGHT ADJUSTMENT ON
2 SIDES

HRO



HAND RAILS ON 1 SIDE O,
MOUNTABLE

HRI



HAND RAILS ON 1 SIDE I,
MOUNTABLE

WL



PAIR OF WHEELS FOR
LOCAL SMALL MOVING

DL



INSIDE DOCK LEVELLER
INSTEAD OF BRIDGE

LD



LADDER TO PLATFORM

LDP



LADDER WITH THE
PLATFORM FOR
PEDESTRIANS

BR2



HYDRAULIC FOLDING
BRIDGE

RF



ROOF ABOVE PLATFORM

TC



TENT COVER OVER THE
PLATFORM, MOUNTABLE

AB




ADDITIONAL
CONNECTION BRIDGE

WGD



WHEEL GUIDES FOR
TRUCK, PAIR

RRB



RUBBER BUMPERS
RECTANGULAR, PAIR

DRBO



RUBBER BUMPERS ON O
SIDE

DRBI




RUBBER BUMPERS ON I
SIDE

ZSRS



ZINC-COATED ANTI-SKID
GRATING INSTEAD OF
REGULAR

SRS



ZINC-COATED GRATING
INSTEAD OF REGULAR

ZRS



ANTI-SKID GRATING
INSTEAD OF REGULAR

CLR



COLOR

RAMPLO WAREHOUSE EQUIPMENT ENLARGE ASSORTMENT OF ITS PRODUCTS


ramplo

Dock levellers RL-DCKL



Provide smooth connection of truck body and floor level of modern warehouses. Electro-hydraulics for easy, safe and fast operation of your technics and stuff.

Container bridges RL-CGB



Connect 0 ground level and floor of sea container, which stays on ground. Safe and simple way to load / unload sea containers.

Loading bridges RL-LB



Installing on edge of dock gate, no need in pitch and electricity. Saves space and upgrades customer warehouse abilities when it is needed.

Scissor lifting tables RL-LT



Electric hydraulic lifting tables carry up to 3000 kg. Ideal for limited spaces inside plants, no need in long incline parts. Put heavy goods on required height, load cargoes from ground to truck body – it will help.

Mobile bridges RL-MB



Cheap, safe and easy connection of dock and truck levels. No need in mounting, no need in power supply.

**All products can be customized according to buyer requirements.
Wider, longer, heavier, lighter, bigger, smaller...etc.**

WE CAN DO IT!



17 YEARS OF EXPERIENCE IN THE PRODUCTION OF LOADING EQUIPMENT



WE **PROVIDE A SOLUTION** TO ANY CHALLENGE OF YOUR CUSTOMER AND THAT'S WHAT MAKES US UNIQUE



SUPPLIED EQUIPMENT TO MORE THAN **35 COUNTRIES** WORLDWIDE



471 SPECIAL DESIGNED PRODUCTS SOLD



MORE THAN **1000 SATISFIED CLIENTS** OVER THE WORLD AND THIS IS JUST THE BEGINNING!



PRODUCED **OVER 1120 ITEMS**



OWN **MODERN FACTORY**



THE RANGE OF OUR EQUIPMENT INCLUDES EVEN **MORE THAN 20 TYPES OF WAREHOUSE EQUIPMENT** AND FORKLIFT ATTACHMENTS



WHY CHOOSE US

- ✓ Own production capacities
- ✓ Team of experts
- ✓ Superb pre- and after- sales service
- ✓ All products are CE certified
- ✓ Use of high-quality materials
- ✓ The most popular models are always in stock
- ✓ A wide range of products
- ✓ Timely delivery
- ✓ Our product is reliable, low-maintenance and durable

WHAT ALL THESE COMPANIES GOT AFTER RECEIVING OUR EQUIPMENT?



they made unloading and loading of any product 2-3 times faster



they have invested in equipment that will work for their business for years to come



they have saved on labor costs and optimized logistics processes



in addition, the equipment is versatile because it is height-adjustable, i.e. suitable for all types of transport



with mobile ramp their companies also became mobile!

OUR MAIN GOAL

to make our client happy with the successful completion of his project!

ramplo

ramplo.net

Contact your dealer:

